


Pine IMAP Configuration:

From the command line prompt on Pegasus, type “pine” and press return.
(If you need assistance connecting to Pegasus with SSH please check [CORE Documentation Site](#) for additional help)

This will display a short summary of the steps we are about to complete, press return to continue.

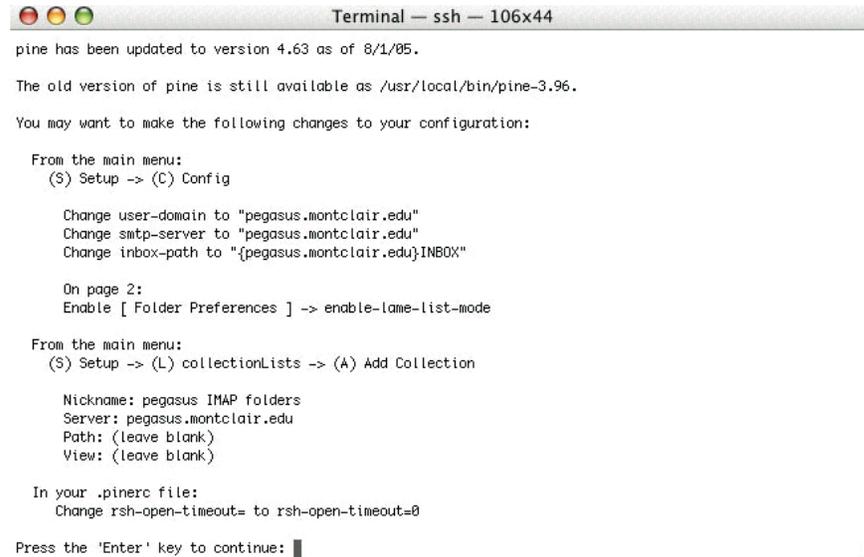

```
Terminal — ssh — 106x44
pine has been updated to version 4.63 as of 8/1/05.

The old version of pine is still available as /usr/local/bin/pine-3.96.

You may want to make the following changes to your configuration:

From the main menu:
(S) Setup -> (C) Config

    Change user-domain to "pegasus.montclair.edu"
    Change smtp-server to "pegasus.montclair.edu"
    Change inbox-path to "{pegasus.montclair.edu}INBOX"

On page 2:
Enable [ Folder Preferences ] -> enable-lame-list-mode


From the main menu:
(S) Setup -> (L) collectionLists -> (A) Add Collection

    Nickname: pegasus IMAP folders
    Server: pegasus.montclair.edu
    Path: (leave blank)
    View: (leave blank)

In your .pinerc file:
Change rsh-open-timeout= to rsh-open-timeout=0

Press the 'Enter' key to continue: █
```

With the arrow keys on your keyboard scroll down until “SETUP” is highlighted and press return.

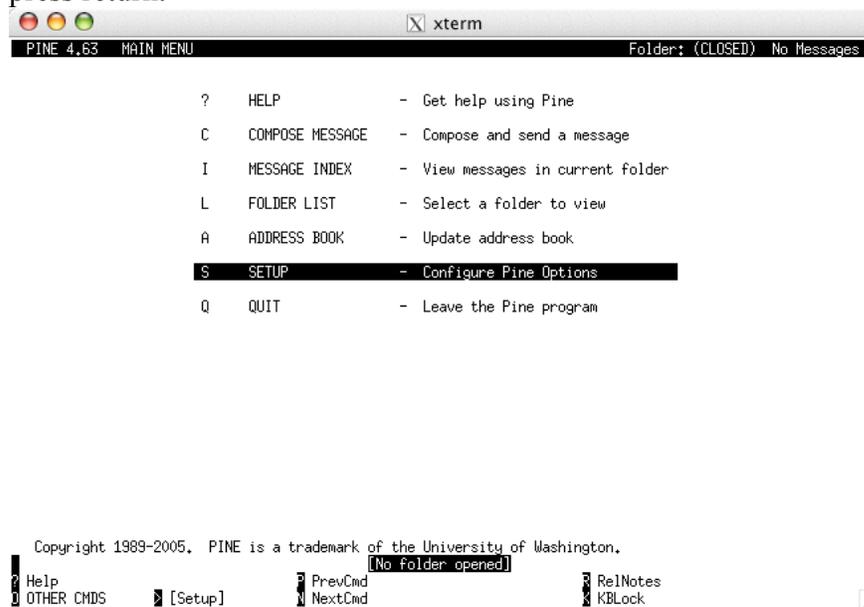

```
xterm
PINE 4.63  MAIN MENU  Folder: (CLOSED) No Messages

?  HELP          - Get help using Pine
C  COMPOSE MESSAGE - Compose and send a message
I  MESSAGE INDEX  - View messages in current folder
L  FOLDER LIST    - Select a folder to view
A  ADDRESS BOOK   - Update address book
S  SETUP         - Configure Pine Options
Q  QUIT          - Leave the Pine program

Copyright 1989-2005. PINE is a trademark of the University of Washington.
[No folder opened]
? Help      [Setup]  P PrevCmd  R RelNotes
O OTHER CMDS  [Setup]  N NextCmd  K KBlock
```

With the keyboard type the ‘C’ key for Configuration

```
PINE 4.63 SETUP Folder: (CLOSED) No Messages

This is the Setup screen for Pine. Choose from the following commands:

(E) Exit Setup:
  This puts you back at the Main Menu.

(P) Printer:
  Allows you to set a default printer and to define custom
  print commands.

(N) Newpassword:
  Change your password.

(C) Config:
  Allows you to set many features which are not turned on by default.
  You may also set the values of many options with that command.

(S) Signature:
  Enter or edit a custom signature which will
  be included with each new message you send.

(A) AddressBooks:
  Define a non-default address book.

(L) collectionLists:
  You may define groups of folders to help you better organize your mail.

(R) Rules:
  This has up to five sub-categories: Roles, Index Colors, Filters.

? Help      Exit Setup  Newpassword  Signature    collectionList
OTHER CMDS  Printer      Config       AddressBooks collectionList Rules        Kolor
```

With the arrow keys on your keyboard, scroll down until you have highlighted “user-domain” and press return. This will bring up a message on the screen that asks you to “Enter the text to be added:” type “pegasus.montclair.edu” and press return.

```
PINE 4.63 SETUP CONFIGURATION Folder: (CLOSED) No Messages

personal-name      = <No Value Set: using "Thomas Hoskinson">
user-domain        = <No Value Set>
smtp-server        = <No Value Set>
nntp-server        = <No Value Set>
inbox-path         = {pegasus.montclair.edu}inbox
incoming-archive-folders = <No Value Set>
pruned-folders     = <No Value Set>
default-fcc        = <No Value Set: using "sent-mail">
default-saved-msg-folder = <No Value Set: using "saved-messages">
postponed-folder   = <No Value Set: using "postponed-msgs">
read-message-folder = <No Value Set>
form-letter-folder = <No Value Set>
literal-signature  = <No Value Set>
signature-file     = <No Value Set: using ".signature">
feature-list       =

Set      Feature Name
-----
[ Composer Preferences ]
[ ] alternate-compose-menu
[ ] alternate-role-menu
[ ] compose-cancel-confirm-uses-yes
[ ] compose-cut-from-cursor
[ ] compose-maps-delete-key-to-ctrl-d
[ ] compose-rejects-unqualified-addr
[ ] compose-send-offers-first-filter
[ ] downgrade-multipart-to-text
[ ] enable-alternate-editor-cmd
[ ] enable-alternate-editor-implicitly

Enter the text to be added : pegasus.montclair.edu
? Help
Cancel      Ret Accept
```

Repeat the above step for “smtp-server” by entering “pegasus.montclair.edu” and “inbox-path” by entering “{pegasus.montclair.edu}INBOX”

Once you have completed these continue to scroll down with use of the arrow keys on your keyboard to “enable-lame-list-mode” under “[Folder Preferences]”. To place an ‘X’ in this option to enable it press the return key.

```

PINE 4.63  SETUP CONFIGURATION                               Folder: (CLOSED) No Messages

[ ] enable-reply-indent-string-editing
[ ] include-attachments-in-reply
[ ] include-header-in-reply
[ ] include-text-in-reply
[ ] reply-always-uses-reply-to
[ ] signature-at-bottom
[ ] strip-from-sigdashes-on-reply
[ Sending Preferences ]
[ ] disable-sender
[ ] enable-8bit-esmtp-negotiation
[ ] enable-background-sending
[ ] enable-delivery-status-notification
[ ] enable-verbose-smtp-posting
[ ] fcc-on-bounce
[ ] fcc-only-without-confirm
[ ] fcc-without-attachments
[ ] mark-fcc-seen
[ ] send-without-confirm
[ ] use-sender-not-x-sender
[ ] warn-if-blank-to-and-cc-and-newsgroups
[ ] warn-if-blank-subject
[ Folder Preferences ]
[ ] combined-subdirectory-display
[ ] combined-folder-display
[ ] enable-dot-folders
[ ] enable-incoming-folders
[X] enable-lame-list-mode
[ ] expanded-view-of-folders

? Help      [E] Exit Setup      [P] Prev      [PgUp] PrevPage      [PrtSc] Print
              [X] [Set/Unset]    [N] Next      [PgDn] NextPage      [WhereIs]

```

Type ‘E’ to exit Setup, a message will come on the screen to see if you wish to “Commit Changes”, type ‘Y’ and press return.

```

PINE 4.63  SETUP CONFIGURATION                               Folder: (CLOSED) No Messages


[ ] enable-reply-indent-string-editing
[ ] include-attachments-in-reply
[ ] include-header-in-reply
[ ] include-text-in-reply
[ ] reply-always-uses-reply-to
[ ] signature-at-bottom
[ ] strip-from-sigdashes-on-reply
[ Sending Preferences ]
[ ] disable-sender
[ ] enable-8bit-esmtp-negotiation
[ ] enable-background-sending
[ ] enable-delivery-status-notification
[ ] enable-verbose-smtp-posting
[ ] fcc-on-bounce
[ ] fcc-only-without-confirm
[ ] fcc-without-attachments
[ ] mark-fcc-seen
[ ] send-without-confirm
[ ] use-sender-not-x-sender
[ ] warn-if-blank-to-and-cc-and-newsgroups
[ ] warn-if-blank-subject
[ Folder Preferences ]
[ ] combined-subdirectory-display
[ ] combined-folder-display
[ ] enable-dot-folders
[ ] enable-incoming-folders
[X] enable-lame-list-mode
[ ] expanded-view-of-folders

Commit changes ("Yes" replaces settings, "No" abandons changes)?
? Help      [Y] [Yes]
[C] Cancel  [N] No

```

This will bring you back to the main menu. Type ‘S’ to re-enter the setup menu and then ‘L’ to enter the “CollectionLists” options. To add a new Collection List, type ‘A’ for the “Add Cltn” option.


With use of the arrow keys on the keyboard scroll until “Nickname” is highlighted and type “Pegasus IMAP folders”. Again with the use of the arrow keys highlight “Server” and type “pegasus.montclair.edu”. To save this Folder Collection press the control and the ‘X’ keys on the keyboard.

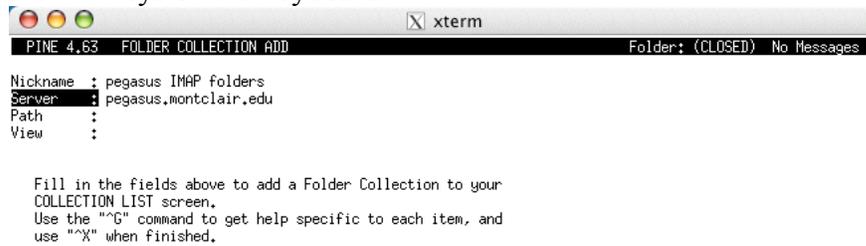

```
PINE 4.63  FOLDER COLLECTION ADD  Folder: (CLOSED)  No Messages


Nickname : pegasus IMAP folders
Server   : pegasus.montclair.edu
Path     :
View     :

Fill in the fields above to add a Folder Collection to your
COLLECTION LIST screen.
Use the "^G" command to get help specific to each item, and
use "^X" when finished.
```



```
HOST: pegasus.montclair.edu ENTER LOGIN NAME [hoskinsont] :
^G Help
^C Cancel      ^Ret Accept
```

A prompt will appear asking that you enter “LOGIN NAME” and “PASSWORD”. When completed you will be asked if you want to “Exit and save changes?” type ‘Y’.

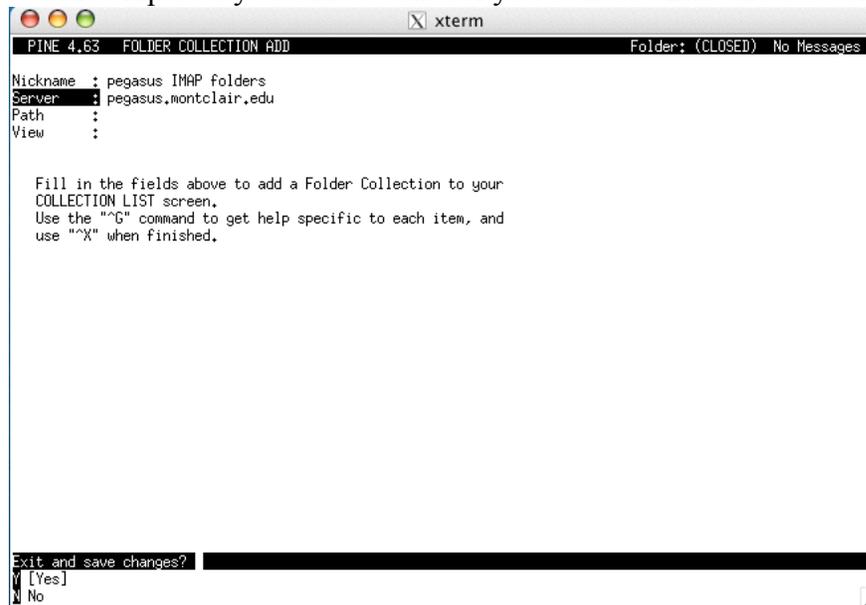

```
PINE 4.63  FOLDER COLLECTION ADD  Folder: (CLOSED)  No Messages

Nickname : pegasus IMAP folders
Server   : pegasus.montclair.edu
Path     :
View     :

Fill in the fields above to add a Folder Collection to your
COLLECTION LIST screen.
Use the "^G" command to get help specific to each item, and
use "^X" when finished.

Exit and save changes?
Y [Yes]
N [No]
```


Highlight “Pegasus IMAP folders” and press ‘\$’ on the keyboard, this will ask you if you wish to shuffle the order of list and press ‘U’ to put the new list at the first. Press ‘X’ to exit setup and ‘Q’ to quit pine.




This should bring you back to the “freddie.montclair.edu%” prompt from which we need to edit your .pinerc file. To do the necessary modifications type the below list of commands with pressing return after each line:

```
cd ~
pico .pinerc
```

With the use of the arrow keys scroll until you have found “rsh-open-timeout=” and type a ‘0’ after the ‘=’

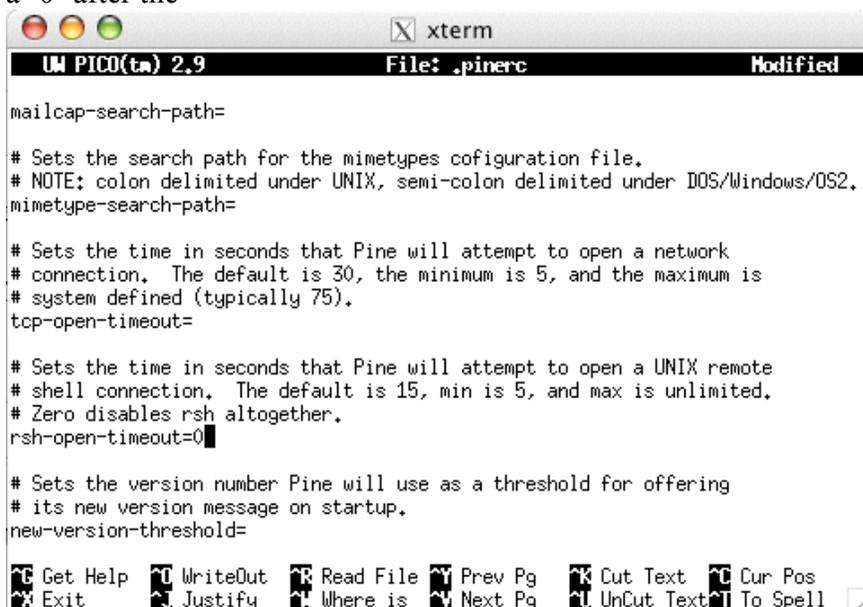

Press the control and 'X' keys to save and exit the change to .pinerc. When asked which file name confirm that the file is ".pinerc" and press return.

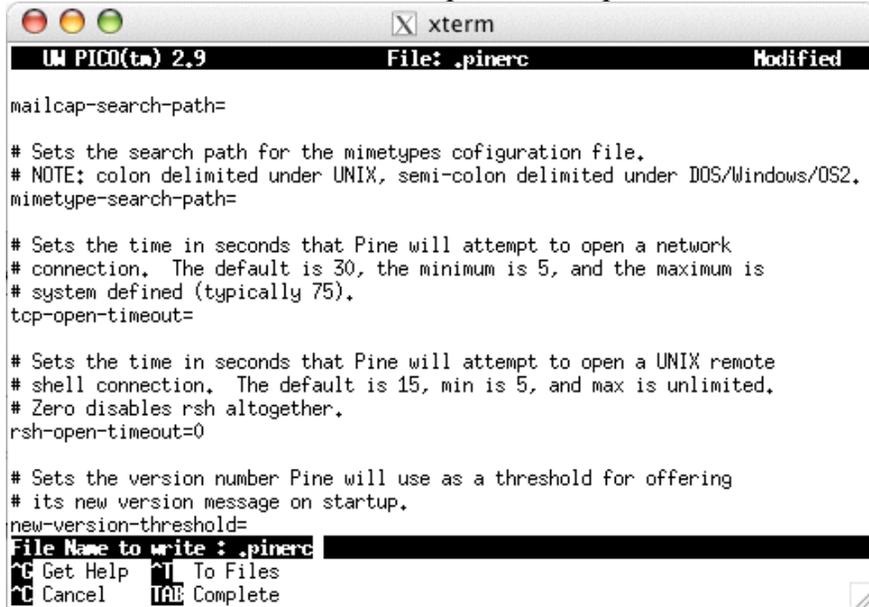

```
mailcap-search-path=
# Sets the search path for the mimetypes cofiguration file.
# NOTE: colon delimited under UNIX, semi-colon delimited under DOS/Windows/OS2.
mimetypes-search-path=
# Sets the time in seconds that Pine will attempt to open a network
# connection. The default is 30, the minimum is 5, and the maximum is
# system defined (typically 75).
tcp-open-timeout=
# Sets the time in seconds that Pine will attempt to open a UNIX remote
# shell connection. The default is 15, min is 5, and max is unlimited.
# Zero disables rsh altogether.
rsh-open-timeout=0
# Sets the version number Pine will use as a threshold for offering
# its new version message on startup.
new-version-threshold=
File Name to write : .pinerc
^G Get Help  ^T To Files
^C Cancel    ^X Complete
```